



### **OUTDOOR LIGHTING COLLECTION**

At night, a property and its surroundings can take on a whole new look thanks to outdoor lighting. You can make your driveways and entrance paths more inviting to guests and less attractive to unwanted intruders. Parts of your buildings, walls, trees and flowerbeds can be highlighted in subtle or more dynamic ways.

### WHY DO DISCERNING PEOPLE CHOOSE ROYAL BOTANIA?

There are three main reasons: quality, harmony and design. With the range of lighting options from Royal Botania, you can make your statement with an aesthetic that speaks for you. Choose from our modern and traditional designs, all of which are made from the finest and most durable materials, and incorporate the latest in lighting technology. Royal Botania premium outdoor lighting is beautiful, practical and flexible, with many of our reading lamps and highlighting pieces being just as suitable for indoor use too.

All our models are made from the highest quality materials. Whether aluminum, glass, stainless steel or teak, every material used to make Royal Botania products is sourced for its purity, durability and perfect aesthetics. But what makes some designs a cut above others? Is it to do with an eye for symmetry, scale and shapes? Is it to do with colors and curves and straight lines? Is it about simplicity and minimalism, and being influenced by the best of the past to create something new? It is very hard to explain why Royal Botania designs work so well, but when you see them, you just know they do.



### **OUTDOOR LIGHTING**

6	Beacon	72	Prato
8	Beacon Wall	74	Q-Bic
12	Beamy	76	Q-Bic Floor
14	Beamy Wall	78	Q-Bic Wall
16	Bullet	80	Q-Bic EP
18	Cloche Wall	82	Ropy
20	Club Lounge	84	Ropy Table
22	Dome Ceiling	88	Rusty
24	Dome Floor	90	Spiky
26	Dome Gate	92	Spiky Lounge
28	Dome Move	94	Spotty Spike
30	Dome Small	98	Spotty Wall
32	Dome Wall	100	Tesla Ceiling
34	Dome Glass Varieties	104	Tesla Wall
36	Ellipse	106	Tristar
38	Ellipse Wall	108	Tristar Alu
40	Irony	112	Wally
42	Lighthouse	114	Accessories
44	Log	115	Materials
46	Log Wall		
48	Lunar		
52	Moso Ground		
54	Moso Wall		
56	Neptune		
60	Non		
62	Omega		
64	Parker Flood		

### **AVAILABILITY OF PRODUCTS**

### STANDARD

Of these products we keep an inventory based on expected sales quantities.

\*

You will notice that some product references are marked with an asterisk (\*). This indicates that the product is only available "while stocks last". Consult us for more information or stock.

### SYMBOLS

IP43	Protected against objects > 1mm & protected against water sprayed at max. angle $60^\circ$
IP44	Protected against objects > 1mm & water projections from all directions (360°)
IP55	Protected against dust & against water sprayed from all directions (360°)
IP65	Totally sealed against dust & against water sprayed from all directions (360°)
IP68	Totally sealed against dust & protected against permanent immersion
٢	Protective category 1
	Protective category 2
	Protective category 3



68

70

Parker Path

Parker Wall

# BEACON



### TECHNICAL INFO

REFERENCE	BCN140B	
	BCN140W	
DIMENSIONS		
WIDTH	9,5 CM	
DEPTH	13,5 CM	
HEIGHT	140 CM	

### MATERIALS



TEAK + PORCELAIN BLACK

TEAK + PORCELAIN WHITE

LED - 2,2W

### LIGHT SOURCE

LAMP
POWER SUPPLY
POWER IN
LIGHT OUTPUT
COLOR TEMPERATUR
IP-RATING

SUPPLY 250mA DRIVER INCLUDED IN FIXTURE IN 100-240V - 50/60Hz UTPUT 390LM TEMPERATURE 2700K G IP65

INSTALLATION OPTION JUB5625

# CE 📧 🖪 🕀 🖨 📱



# **BEACON WALL**



### TECHNICAL INFO

REFERENCE	BCNWB
	BCNWW

### DIMENSIONS

WIDTH	10,5 CM
DEPTH	12,5 CM
HEIGHT	15,5 CM

### MATERIALS




LAMP

TEAK + PORCELAIN BLACK

TEAK + PORCELAIN WHITE

### LIGHT SOURCE




LAMP	LED - 2,2W
POWER SUPPLY	250mA DRI\
	IN FIXTURE
POWER IN	100-240V - !
LIGHT OUTPUT	390LM
COLOR TEMPERATURE	2700K
IP-RATING	IP65

# IVER INCLUDED 50/60Hz



CE 📧 🖪 🕀 🗲 💈



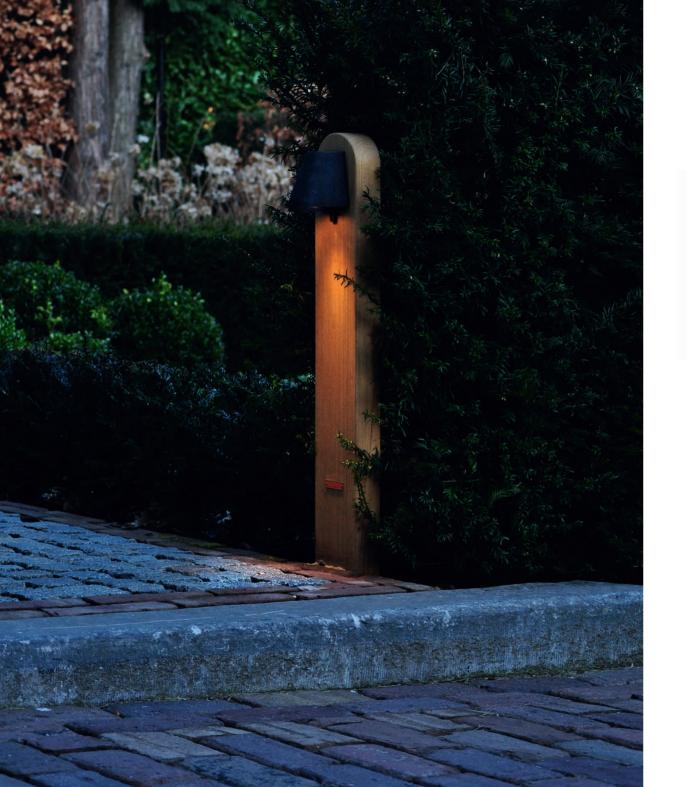

# BEAMY



5 CM

12 CM

### TECHNICAL INFO

REFERENCE BMY1 BMY1

BMY100220 BMY100Z220

### DIMENSIONS

 WIDTH
 12 CM

 DEPTH
 13 CM

 HEIGHT
 100 CM

MATERIALS



TEAK + ANTIQUE BRASS

TEAK + ZINC

### **RECOMMENDED LIGHT SOURCE**

LAMP LED - 5W -POWER IN 230V IP-RATING IP44

LED - 5W - GU10 - FLAT OPTIC 230V IP44

INSTALLATION OPTION JUB5625



# **BEAMY WALL**



### TECHNICAL INFO

REFERENCE	BMYW220
	BMYWZ220
DIMENSIONS	

WIDTH	8 CM
DEPTH	8 CM
HEIGHT	11 CM

### MATERIALS



ANTIQUE	BRAS

SS

ZINC

### RECOMMENDED LIGHT SOURCE

8 CM	8 CM

11 CM


LAMP	LED - 5W - GU10 - FLAT OPTIC
POWER IN	230V
IP-RATING	IP44



( 🗧 🍽 🗛 🔂 🖶 着 💈

# BULLET



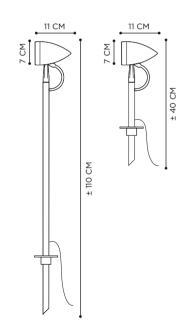

### TECHNICAL INFO

BLTL / BLTLG BLTLAN / BLTLGAN

### DIMENSIONS

WIDTH DEPTH HEIGHT

REFERENCE

7 CM
11 CM
± 40 CM / ± 110 CM




ZINC

### LIGHT SOURCE

LAMP	LED 3W
LIGHT OUTPUT	500LM
COLOR TEMPERATURE	2700K
IP-RATING	IP55
EXTRA	ADJUSTABLE HEAD
REQUIRED	LEDCONKIT OR DRI1

# ANTIQUE BRASS



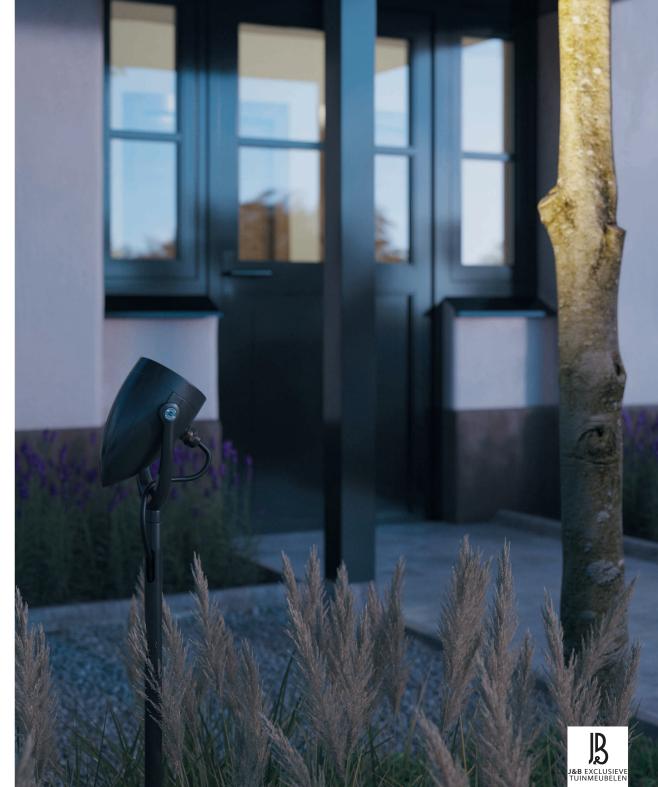



# **CLOCHE WALL**



25 CM

18,5 CM

### TECHNICAL INFO

REFERENCE	CLOW
DIMENSIONS	
WIDTH	12 CM
DEPTH	18,5 CM
HEIGHT	25 CM

### MATERIALS



### TEAK + HANDMADE CLEAR GLASS

### LIGHT SOURCE




4W - DECORATIVE LED FILAMENT BULB INCLUDED 230V - E27 280LM E 2200K IP54





# **CLUB LOUNGE**

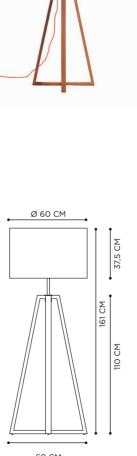



REFERENCE

CLBLTR / CLBLAM (LED) CLBLSTR / CLBLSAM (SOLAR)

60 CM

60 CM 161,5 CM

### DIMENSIONS

WIDTH DEPTH HEIGHT

MATERIALS



TEAK + STAINLESS STEEL (EP) BEIGE SHADE

TEAK + STAINLESS STEEL (EP) AMBER SHADE

### LIGHT SOURCE LED

LAMP POWER SUPPLY LIGHT OUTPUT COLOR TEMPERATURE

LAMP

LIGHT OUTPUT

IP-RATING

COLOR TEMPERATURE

500mA DRIVER INCLUDED



LED 4,3W IN FIXTURE 700LM 2700K IP65




IP-RATING LIGHT SOURCE SOLAR

SOLAR LED 2,6W

2700K

IP65







60 CM



# **DOME CEILING**



TECHNICAL INFO

REFERENCE

DOMECSBCL DOMECSBSM DOMECSBAM DOMECLBCL DOMECLBSM DOMECLBAM

ANTHRACITE

IP43

HANDMADE GLASS


CLEAR / SMOKE / AMBER

### DIMENSIONS

WIDTH DEPTH HEIGHT

30 CM 30 CM 44 CM + 49-84 CM - SHORT 44 CM + 74-134 CM - LONG

POWDER COATED ALUMINIUM




# MATERIALS

LIGHT SOURCE

POWER IN LIGHT OUTPUT COLOR TEMPERATURE IP-RATING





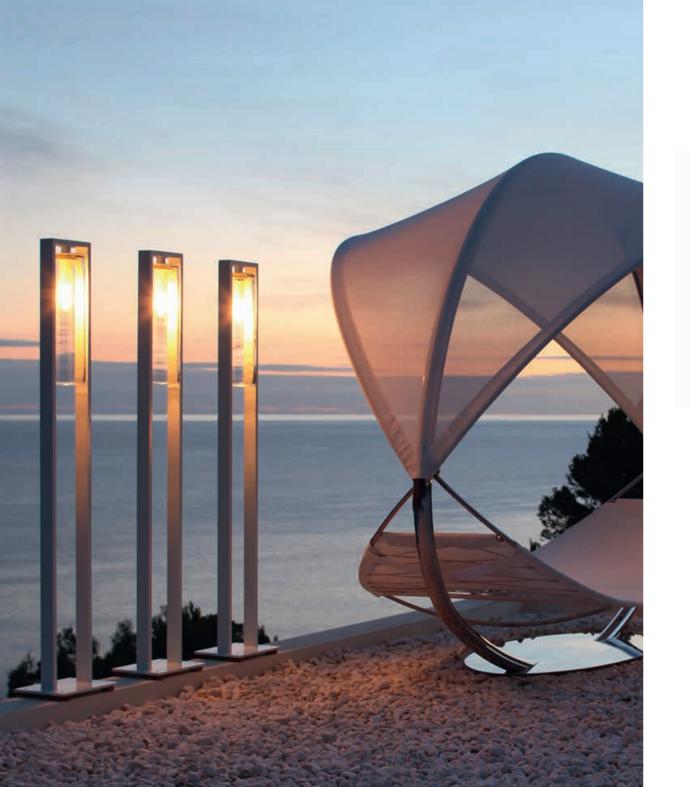

# **DOME FLOOR**



**TECHNICAL INFO** 

DOMEFBCL DOMEFBSM DOMEFBAM DOMEFWCL DOMEFWSM DOMEFWAM

### DIMENSIONS

33 CM 23 CM 171 CM

> POWDER COATED ALUMINIUM ANTHRACITE OR WHITE FRAME

HANDMADE GLASS CLEAR / SMOKE / AMBER

LIGHT SOURCE

POWER IN LIGHT OUTPUT COLOR TEMPERATURE IP-RATING

4W - DECORATIVE LED FILAMENT BULB INCLUDED 230V - E27 280LM 2200K IP43

INSTALLATION OPTION JUB5625

( E 🖽 🗛 🖶 🚄 J&B EXCLUSIEVE<sup>5</sup> TUINMEUBELEN

# DOME GATE



### TECHNICAL INFO

REFERENCE	DOMEGTBCL
	DOMEGTBSM
	DOMEGTBAM
	DOMEGTWCL
	DOMEGTWSM
	DOMEGTWAM

### DIMENSIONS

WIDTH	30 CM
DEPTH	30 CM
HEIGHT	60 CM

### MATERIALS



POWDER COATED ALUMINIUM ANTHRACITE OR WHITE FRAME



HANDMADE GLASS CLEAR / SMOKE / AMBER

### LIGHT SOURCE

LAMP	4W - DECORATIVE LED
	FILAMENT BULB INCLUDED
POWER IN	230V - E27
LIGHT OUTPUT	280LM
COLOR TEMPERATURE	2200K
IP-RATING	IP43

INSTALLATION OPTION JUB5625






Σ

80



# **DOME MOVE**

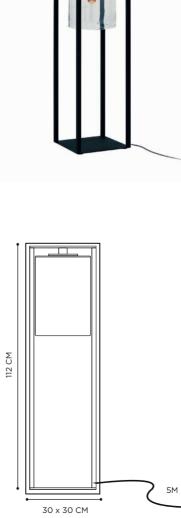

### **TECHNICAL INFO**

REFERENCE


DOMEMBCL
DOMEMBSM
DOMEMBAM
DOMEMWCL
DOMEMWSM
DOMEMWAM

### DIMENSIONS

WIDTH	30 CM
DEPTH	30 CM
HEIGHT	112 CM

### MATERIALS





HANDMADE GLASS CLEAR / SMOKE / AMBER

4W - DECORATIVE LED FILAMENT BULB INCLUDED

230V - E27

280LM

2200K

IP43

### LIGHT SOURCE

- LAMP POWER IN LIGHT OUTPUT
- COLOR TEMPERATURE

- IP-RATING
- EXTRA

GALVANIZED STEEL BALLAST CODE: 03DOMEMBALLAST01



# **DOME SMALL**



30 x 30 CM

Σ

S

### TECHNICAL INFO

REFERENCE

DOMESBCL
DOMESBSM
DOMESBAM
DOMESWCL
DOMESWSM
DOMESWAM

### DIMENSIONS

WIDTH	30 CM
DEPTH	30 CM
HEIGHT	65 CM

### MATERIALS



POWDER COATED ALUMINIUM ANTHRACITE OR WHITE FRAME

### LIGHT SOURCE

LAMP
POWER IN
COLOR TEMPERATUR
IP-RATING

HANDMADE GLASS CLEAR / SMOKE / AMBER 4W - DECORATIVE LED FILAMENT BULB INCLUDED 230V - E27 280LM JRE 2200K IP43

# ( E 🖽 🗛 🖶 🖨 💈



4M

# **DOME WALL**



20 CM

Ø 15 CM

Σ

2

### TECHNICAL INFO

REFERENCE	DOMEWBCL DOMEWBSM DOMEWBAM DOMEWWCL DOMEWWSM DOMEWWAM
DIMENSIONS	
WIDTH	15 CM
DEPTH	20 CM
HEIGHT	65 CM

### MATERIALS



POWDER COATED ALUMINIUM ANTHRACITE OR WHITE FRAME



HANDMADE GLASS CLEAR / SMOKE / AMBER

### LIGHT SOURCE

LAMP	
POWER IN	
LIGHT OUTPUT	
COLOR TEMPERATUR	Е
IP-RATING	

4W - DECORATIVE LED FILAMENT BULB INCLUDED 230V - E27 280LM 2200K IP43

# ( E 🔤 🗛 🖶





### DOME GLASS VARIETIES







# ELLIPSE



17 x 9 CM

18 X 10 CM

Σ

0 Q TECHNICAL INFO

REFERENCE

ELL40 \* / ELL40L \* (LED)

### DIMENSIONS

 WIDTH
 17 CM

 DEPTH
 9 CM

 HEIGHT
 40 CM

MATERIALS



TEAK + STAINLESS STEEL

### **RECOMMENDED LIGHT SOURCE**

LAMP POWER IN IP-RATING LED / FLUO MAX. 11W 230V - E27 IP55

( E 🔤 🖪 🖶 👍 📱

# LIGHT SOURCE FOR LED

LAMP POWER IN LIGHT OUTPUT COLOR TEMPERATURE IP-RATING LED 8,5W 230V - 50 Hz 470LM 3000K IP55

INSTALLATION OPTION JUB5625





# **ELLIPSE WALL**



TECHNICAL INFO

REFERENCE

ELLW / ELLWL (LED)

### DIMENSIONS

WIDTH8 CMDEPTH12 CMHEIGHT42 CM

### MATERIALS



TEAK + STAINLESS STEEL

### **RECOMMENDED LIGHT SOURCE**

LAMP POWER IN IP-RATING LED / FLUO MAX. 11W 230V - E27 IP55




### LIGHT SOURCE FOR LED

LAMP	LED
POWER IN	230\
LIGHT OUTPUT	470L
COLOR TEMPERATURE	3000
IP-RATING	IP55

ED 8,5W SOV - 50 Hz ZOLM DOOK 55

INSTALLATION OPTION JUB5625





# IRONY



### TECHNICAL INFO

REFERENCE	IRN70 / IRN70L (LED)
DIMENSIONS	
WIDTH	20 CM
DEPTH	10 CM
HEIGHT	70 CM

### MATERIALS



CAST IRON

### **RECOMMENDED LIGHT SOURCE**

10 x 20 CM



LAMP POWER IN IP-RATING 2x LED / FLUO MAX. 11W 230V - E27 IP55

# CE 🔤 🖪 🗖 🖨 💈

### LIGHT SOURCE FOR LED

LAMP	2x LED 8,5W
POWER IN	230V - 50 Hz
LIGHT OUTPUT	470LM
COLOR TEMPERATURE	3000K
IP-RATING	IP55

INSTALLATION OPTION JUB5625

# CE 🔤 🖪 🕀 🖨 💈



# LIGHTHOUSE



REFERENCE	LIG40 / LIG40L (LED) * LIG40ST / LIG40STL (LED)
DIMENSIONS	
WIDTH	10 CM
DEPTH	10 CM
HEIGHT	40 CM

### MATERIALS



GRANITE + STAINLESS STEEL

TEAK + BRASS

### **RECOMMENDED LIGHT SOURCE**

LAMP POWER IN IP-RATING LED / FLUO MAX. 11W 230V - E27 IP55

# CE 🔤 🖪 🔲 👍 💈


### LIGHT SOURCE FOR LED

LAMP	1x LED 8,5W
POWER IN	230V - 50 Hz
LIGHT OUTPUT	470LM
COLOR TEMPERATURE	3000K
IP-RATING	IP55

INSTALLATION OPTION JUB5625







10 x 10 CM



# LOG



• •

20 CM

5 CM

8 CM

70 CM

EXTRAS

### TECHNICAL INFO

REFERENCE	LOG70 *
DIMENSIONS	
WIDTH DEPTH HEIGHT	16 CM 5 CM 70 CM
MATERIALS	TEAK + STAINLESS STEEL
LAMP POWER SUPPLY POWER IN	POWERLED 3W 350mA DRIVER INCLUDED IN FIXTURE 100-240V - 50/60Hz
LIGHT OUTPUT COLOR TEMPERATURE IP-RATING	450LM 2700K IP65

WERLED 3W OmA DRIVER INCLUDED FIXTURE -240V - 50/60Hz OLM 00K IP65

ADJUSTABLE ANGLE 120° INSTALLATION OPTION JUB5625





# LOG WALL



### **TECHNICAL INFO**



REFERENCE

DIMENSIONS

WIDTH	14 CM
DEPTH	10 CM
HEIGHT	7 CM

MATERIALS



### TEAK + STAINLESS STEEL

LOGW \*

14 CM 7 CM

10 CM

LAMP POWER SUPPLY

LIGHT SOURCE

POWER IN LIGHT OUTPUT COLOR TEMPERATURE IP-RATING

POWERLED 3W 350mA DRIVER INCLUDED IN FIXTURE 100-240V - 50/60Hz 450LM 2700K IP65

EXTRAS

ADJUSTABLE ANGLE 90°



# LUNAR



### TECHNICAL INFO

REFERENCE	LNRWAC
DIMENSIONS	
WIDTH DEPTH	Ø 22 CM 5,7 CM


### MATERIALS



ARABESCATO CARRARA

### LIGHT SOURCE

LAMP LED STRIP 4,8W POWER SU POWER IN LIGHT OU COLOR TE IP-RATING



SUPPLY	DRIVER INCLUDED IN FIXTURE
N	24V
JTPUT	600LM
EMPERATURE	2700K
G	IP65

# CE 📧 🖪 🕀 🗲 💈






# **MOSO GROUND**







### TECHNICAL INFO

REFERENCE	MSOGA
DIMENSIONS	
WIDTH	Ø 12 CM
DEPTH	50 CM
HEIGHT	43,5 CM


### MATERIALS

POWDER COATED ALUMINIUM ANTHRACITE

### LIGHT SOURCE

LAMP POWER SUPPLY POWER IN LIGHT OUTPUT COLOR TEMPERATURE IP-RATING

### LED 4,3W 500mA DRIVER INCLUDED IN FIXTURE 100-240V - 50/60Hz 700LM E 2700K IP65

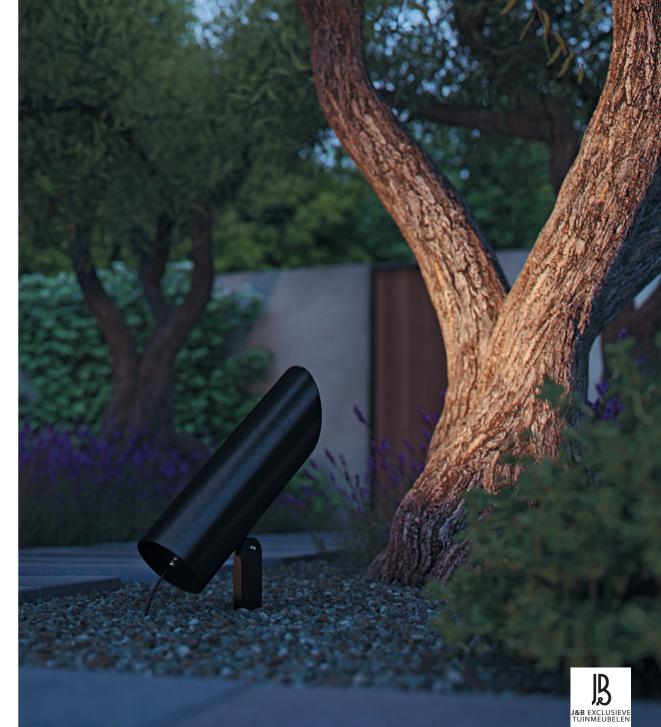

# C E 📧 🖪 🖶 📹 💈

# **MOSO WALL**



### TECHNICAL INFO

REFERENCE	MSOWUW
	MSOWUB
	MSOWUNB
	MSOWDW
	MSOWDB
	MSOWDNB

### DIMENSIONS

WIDTH	10 CM
DEPTH	10 CM
HEIGHT	30 CM

### MATERIALS

### LIGHT SOURCE

### LAMP POWER SUPPLY POWER IN LIGHT OUTPUT COLOR TEMPERATURE IP-RATING

EXTRA

### LED 3W 350mA DRIVER INCLUDED IN FIXTURE 100-240V - 50/60Hz 450LM 2700K IP65


WHITE / BLACK / NIGHTBLUE

PORCELAIN

ADJUSTBLE BEAM UP OR DOWN LIGHTER





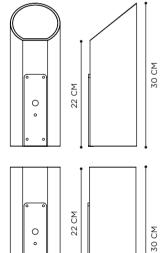

10 CM

0

10 CM



# NEPTUNE



Σ

8

Ø 17 CM

Ø 17 CM

### TECHNICAL INFO

REFERENCE

NPT60 / NPT60L (LED) \* NPT100 / NPT100L (LED) \*

### DIMENSIONS

WIDTH DEPTH HEIGHT Ø 17 CM Ø 17 CM 60 CM / 100 CM

### MATERIALS

STAINLESS STEEL

### **RECOMMENDED LIGHT SOURCE**

LAMP POWER IN IP-RATING

100 CM

3x LED / FLUO MAX. 11W 230V - E27 IP55

### LIGHT SOURCE FOR LED

LAMP POWER IN LIGHT OUTPUT COLOR TEMPERATURE IP-RATING CONNECTION BOX









# NON



### TECHNICAL INFO

REFERENCE

### NONR \* NONO \*

9 CM

19,5 CM

19 CM

### DIMENSIONS

WIDTH DEPTH HEIGHT

MATERIALS



ELECTRO & HAND POLISHED STAINLESS STEEL

CUBE IN CARMINE RED OR ORGANIC OLIVE

### LIGHT SOURCE

LAMP POWER SUPPLY POWER IN LIGHT OUTPUT COLOR TEMPERATURE IP-RATING

LED 2,2W 250mA DRIVER INCLUDED IN FIXTURE 100-240V - 50/60Hz 390LM URE 2700K IP65





0

# **OMEGA**



### TECHNICAL INFO

OMG1D220EP OMG2D220EP

### DIMENSIONS

LAMP

POWER IN

IP-RATING

REFERENCE

WIDTH	8 CM
DEPTH	9,5 CM
HEIGHT	8 CM / 14,5 CM

9,5 CM 9,5 CM 9,5 CM 9,5 CM S S S S S S S S

# MATERIALS


ELECTROPOLISHED STAINLESS STEEL

( 🗧 🔤 🗛-С 🖶 着 💈

14°.5°CM

### RECOMMENDED LIGHT SOURCE

LED 5W - GU10 FLAT OPTIC 230V IP55

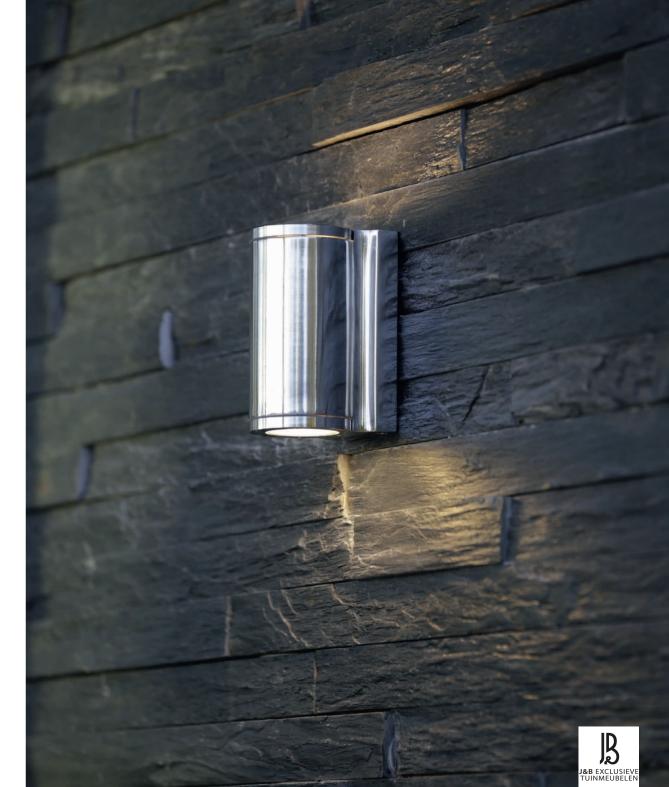

# PARKER FLOOD



### TECHNICAL INFO

REFERENCE	PRKF
DIMENSIONS	
WIDTH	Ø 10 - 16 CM
DEPTH	22,5 CM
HEIGHT	230 CM

### MATERIALS

### LIGHT SOURCE

LAMP
POWER SUPPLY

POWER IN LIGHT OUTPUT IP-RATING

EXTRAS

### LED 3W 350mA DRIVER INCLUDED IN FIXTURE 100-240V - 50/60Hz 450LM IP65

ANTIQUE BRASS

GRANITE BASE Ø 40 CM INCLUDED







# PARKER PATH



### TECHNICAL INFO

REFERENCE	PRKP
DIMENSIONS	
WIDTH	Ø 10 - 16 CM
DEPTH	22,5 CM
HEIGHT	230 CM

### MATERIALS



ANTIQUE BRASS

### LIGHT SOURCE

LAMP POWER SUPPLY

POWER IN LIGHT OUTPUT IP-RATING LED 3W 350mA DRIVER INCLUDED IN FIXTURE 100-240V - 50/60Hz 450LM IP65

EXTRAS



CLUDED



# ( 📧 🖪 🖶 着 💈



# **PARKER WALL**



TECHNICAL INFO

REFERENCE PRKW DIMENSIONS Ø 10 - 16 CM 25 CM 42 CM

### MATERIALS

WIDTH

DEPTH

HEIGHT



ANTIQUE BRASS

### LIGHT SOURCE

LAMP POWER SUPPLY POWER IN LIGHT OUTPUT IP-RATING

LED 3W 350mA DRIVER INCLUDED IN FIXTURE 100-240V - 50/60Hz 450LM IP65



Ø 10 - 16 CM 42 CM



# PRATO



#### TECHNICAL INFO

REFERENCE

PRTWW \*

WHITE

#### DIMENSIONS


WIDTH DEPTH

HEIGHT

Ø 25 CM 34 CM 16 CM

#### MATERIALS

LIGHT SOURCE



34 CM



Ø 25 CM

LAMP POWER SUPPLY POWER IN LIGHT OUTPUT COLOR TEMPERATURE

IP-RATING

LED 5,8W 500mA DRIVER INCLUDED IN FIXTURE 100-240V - 50/60Hz 540LM 3000K IP65

POWDER COATED ALUMINIUM





# **Q-BIC**



9 x 9 CM

#### TECHNICAL INFO

REFERENCE

QB302D220EP QB601D220EP \* QB602D220EP

#### DIMENSIONS

WIDTH DEPTH HEIGHT

12,5 - 20 CM 7,5 CM 30 CM / 60 CM

#### MATERIALS



60 CM

9 x 9 CM



TEAK + ELECTROPOLISHED STAINLESS STEEL

#### **RECOMMENDED LIGHT SOURCE**

LAMP POWER IN IP-RATING

LED 5W - GU10 FLAT OPTIC 230V IP55

EXTRAS ADJUSTA INSTALLATION OPTION JUB5625

ADJUSTABLE ANGLE 270° JUB5625





# **Q-BIC FLOOR**





REFERENCE

QBG1D220EP QBG2D220EP

#### DIMENSIONS

12,5 - 20 CM WIDTH DEPTH 7,5 CM HEIGHT 10 CM

MATERIALS

LAMP POWER IN TEAK + ELECTROPOLISHED STAINLESS STEEL





**RECOMMENDED LIGHT SOURCE** 

IC
ΊC

ADJUSTABLE ANGLE 270°







20 CM

7,5 CM

EXTRAS



# **Q-BIC WALL**



#### TECHNICAL INFO


QBW1D220EP QBW2D220EP

#### DIMENSIONS

REFERENCE

WIDTH	7,5 CM
DEPTH	12,5 CM
HEIGHT	10 - 20 CM

#### MATERIALS



10 CM

10 CM



TEAK + ELECTROPOLISHED STAINLESS STEEL

#### **RECOMMENDED LIGHT SOURCE**

LAMP POWER IN IP-RATING LED 5W - GU10 FLAT OPTIC 230V IP55



( E 📧 🗛 🖨 🗿

## **Q-BIC EP**



#### **TECHNICAL INFO**

QBWVD220EP REFERENCE DIMENSIONS WIDTH 9 CM DEPTH 11 CM HEIGHT 7,5 CM

#### MATERIALS




LAMP

ELECTROPOLISHED STAINLESS STEEL

#### **RECOMMENDED LIGHT SOURCE**

$\circ - \circ$	
$\circ - \circ$	
75 614	
7.5 CM	



LAMP	
POWER IN	
IP-RATING	

EXTRAS









### ROPY



#### **TECHNICAL INFO**

REFERENCE	RPY040AB
	RPY040GG
	RPY040SD
DIMENSIONS	
WIDTH	Ø 29 CM

DEPTH	
HEIGHT	

MATERIALS







Ø 29 CM

POWDER COATED ALUMINIUM
ANTHRACITE + POLYOLEFIN ROPE
BRONZE

Ø 29 CM

40 CM

POWDER COATED ALUMINIUM GREEN + POLYOLEFIN ROPE GREEN

POWDER COATED ALUMINIUM SAND + POLYOLEFIN ROPE DESERT

LIGHT SOURCE SOLAR

LAMP	SOLAR LED 2,6W
	RECHARGEABLE VIA USB
LIGHT OUTPUT	400LM
COLOR TEMPERATURE	2700K
IP-RATING	IP65

# CE 🔤 🖪 🕸 👍 💈



# **ROPY TABLE**



<b>TECHNICAL I</b>	NFO
--------------------	-----

RPYTBAB
RPYTBGG
RPYTBSD

#### DIMENSIONS

REFERENCE

WIDTH	
DEPTH	
HEIGHT	



SOLAR LAMP

Ø 20,2 CM

26

### MATERIALS



Ø 20,2 CM

Ø 20,2 CM

26 CM

POWDER COATED ALUMINIUM GREEN + POLYOLEFIN ROPE GREEN

POWDER COATED ALUMINIUM SAND + POLYOLEFIN ROPE DESERT

#### LIGHT SOURCE SOLAR


LAMP
LIGHT OUTPUT
COLOR TEMPERATUR
IP-RATING

### SOLAR LED 1W RECHARGEABLE VIA USB 150LM TURE 2700K IP65







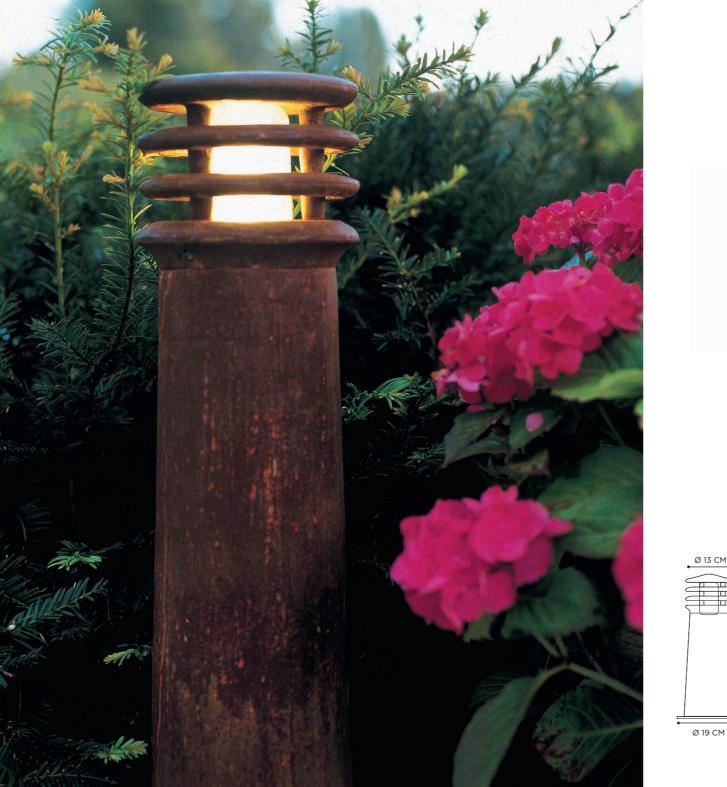

# RUSTY


Ø 13 CM



J&B EXCLUSIEVE<sup>9</sup> TUINMEUBELEN



### **SPIKY**

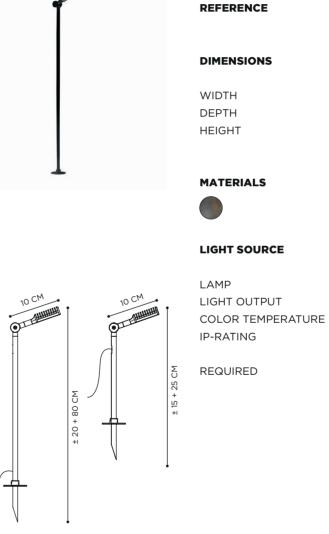

Ø 1,3 CM	
10 CM	

SPKG

SPK


**TECHNICAL INFO** 

40 CM - 100 CM

ANTIQUE BRASS

POWERLED 3W TPUT 450LM EMPERATURE 2700K B IP65

LEDCONKIT OR DRI1

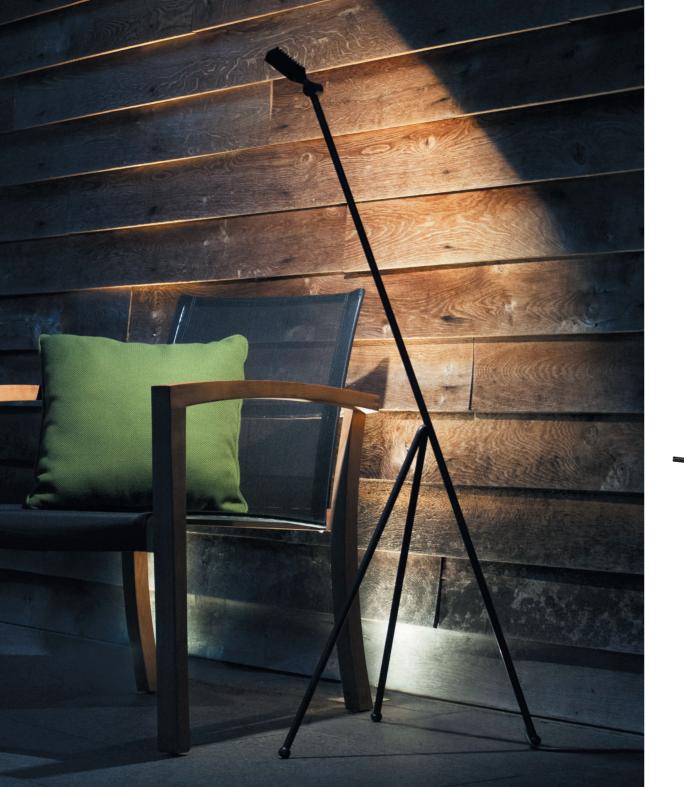

# **SPIKY LOUNGE**



 $\mathbf{S}$ 

#### TECHNICAL INFO

SPL \*

#### DIMENSIONS

REFERENCE

 WIDTH
 36 CM

 DEPTH
 ± 36 CM

 HEIGHT
 ± 100 CM

#### MATERIALS



20 + 80

ANTIQUE BRASS

#### LIGHT SOURCE

- LAMP POWER SUPPLY POWER IN LIGHT OUTPUT COLOR TEMPERATURE
- POWERLED 3W 350mA DRIVER INCLUDED IN FIXTURE 100-240V - 50/60Hz 450LM 2700K IP65



# **SPOTTY SPIKE**





Ī	
15 + 60 CM	
	Ц

5 + 120 CM

#### TECHNICAL INFO

SPTHBR + SPTS060BR / SPTS120BR

#### DIMENSIONS

WIDTH

HEIGHT

REFERENCE

9 CM 60 CM / 120 CM

#### MATERIALS

POWDER COATED ALUMINIUM BRONZE


#### LIGHT SOURCE

LAMPLED 3WLIGHT OUTPUT500LMCOLOR TEMPERATURE2700KIP-RATINGIP65

REQUIRED

LEDCONKIT OR DRI1



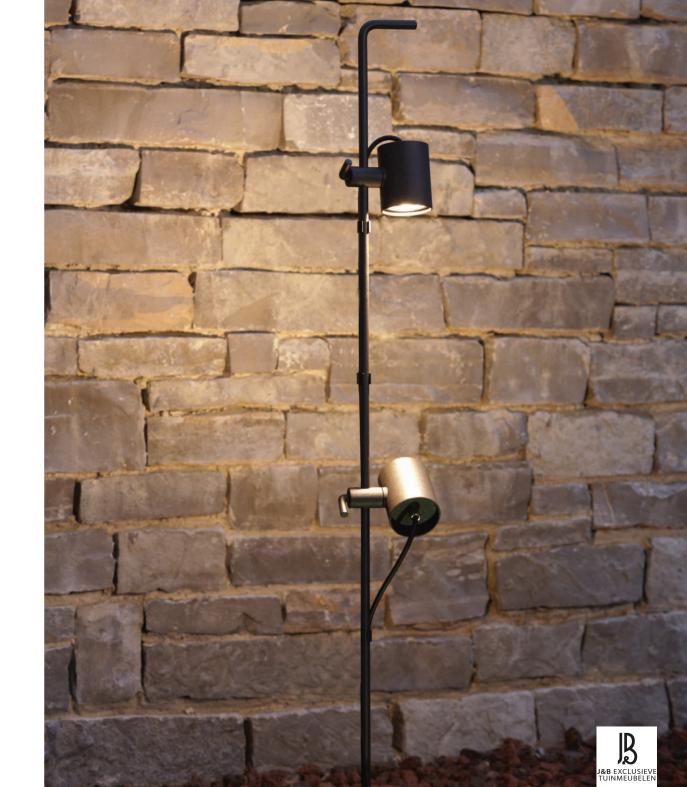



# **SPOTTY WALL**



Ø 9 CM

١

TECHNICAL INFO	
REFERENCE	SPTWBR
DIMENSIONS	
HEIGHT	9 CM

#### MATERIALS

#### LIGHT SOURCE

LAMP LIGHT OUTPUT COLOR TEMPERATU IP-RATING POWER SUPPLY

	LED 3W
	500LM
URE	2700K
	IP65
	350MA DRIVER INCLUDED
	IN FIXTURE

BRONZE

POWDER COATED ALUMINIUM







# **TESLA CEILING**



#### TECHNICAL INFO

REFERENCE

TSLCA

#### DIMENSIONS

 WIDTH
 15 CM

 DEPTH
 15 CM

 HEIGHT
 25 CM

#### MATERIALS




POWDER COATED ALUMINIUM ANTHRACITE + HANDMADE CLEAR GLASS

#### LIGHT SOURCE

LAMP POWER IN LIGHT OUTPUT COLOR TEMPERATURE IP-RATING

4W - DECORATIVE LED FILAMENT BULB INCLUDED 230V - E27 280LM 2200K IP43









# **TESLA WALL**



16 CM

#### TECHNICAL INFO

REFERENCE

#### TSLWA

#### DIMENSIONS

WIDTH15 CMDEPTH16 CMHEIGHT25 CM

#### MATERIALS



POWDER COATED ALUMINIUM ANTHRACITE + HANDMADE CLEAR GLASS

#### LIGHT SOURCE


Δ IS CM LAMP POWER IN LIGHT OUTPUT COLOR TEMPERATURE IP-RATING

#### 4W - DECORATIVE LED FILAMENT BULB INCLUDED 230V - E27 280LM 2200K IP43



# TRISTAR





# Ø 29,5 CM \_



REFERENCE	TRS045
	TRS050

#### DIMENSIONS

WIDTH	24,5/29,5
DEPTH	24,5/29,5
HEIGHT	40CM/50

### MATERIALS

TEAK

HANDMADE GLASS OPAL / SMOKE

#### LIGHT SOURCE



EXTRAS

6,5 M

### 4W - DECORATIVE LED FILAMENT BULB INCLUDED 230V - E27 280LM 2200K IP43

CABLE 6,5 METER






# **TRISTAR ALU**



ø 2	4,5 CM		
		29 CM	
			E



#### TECHNICAL INFO

REFERENCE	TRSO45A TRSO45WR TRSO50A
	TRS050A
DIMENSIONS	
WIDTH	24,5/29,5 CM
DEPTH	24,5/29,5 CM
HEIGHT	40CM/50 CM

#### MATERIALS



6,5 M

δ

ß

6,5 M

POWDER COATED ALUMINIUM ANTHRACITE OR WHITE FRAME

#### LIGHT SOURCE



EXTRAS

# HANDMADE GLASS OPAL / SMOKE

4W - DECORATIVE LED
FILAMENT BULB INCLUDED
230V - E27
280LM
2200K
IP43

CABLE 6,5 METER

C E 🔤 🗛 🖨 🗿







# WALLY



7,5 CM

0

Ø6CM

TECHNICAL INFO

REFERENCE

WAL1D220 \*

DIMENSIONS

 WIDTH
 6 CM

 DEPTH
 7,5 CM

 HEIGHT
 10 CM

MATERIALS



ANTIQUE BRASS

#### **RECOMMENDED LIGHT SOURCE**

LAMP POWER IN IP-RATING LED 5W - GU10 FLAT OPTIC 230V IP44



LIGB	STAINLESS STEEL SPIKE: LIGHTHOUSE / NORTHPOLE / ELLIPSE / IRONY	
LBN	STAINLESS STEEL SPIKE: Q-BIC 30/60 / TWIN / MOSO GROUND / NON-SIDE	
LBQ	STAINLESS STEEL SPIKE: Q-BIC GROUND / Q-BIC WALL / NON	
LBNPT	STAINLESS STEEL SPIKE: NEPTUNE	
LBD	GALVANISED STEEL SPIKE: DOME FLOOR	
LBDM	GALVANISED STEEL SPIKE: DOME MOVE	
LBL	STAINLESS STEEL SPIKE: LOG	
LBR	GALVANISED STEEL SPIKE: RUSTY	
BL360	PERFORATED SCREEN 360° - STAINLESS STEEL	
BL180	PERFORATED SCREEN 180° - STAINLESS STEEL	
BINLS	LED INSERT FOR NEW OR REPLACEMENT FIXTURES LED 8,5W - 470lm - 3000K - 230V / 50Hz	CE 🖭 🖶
BINLR	LED INSERT FOR NEW OR REPLACEMENT FIXTURES WITH VARIOUS LIGHTOUTPUT LED 2,2W - 390Im UP TO 4,3W - 700Im - 2700K (For more info: Please contact your Royal Botania Dealer)	<b>C E</b> 1955
BIN2	E27 LAMP HOLDER - 220V/E27 - LED FLUO MAX 11W	C E 💵
LEDCONKIT	= DRI1 + JUB5625 + JUB5630	
DRI1	IP68 LED DRIVER 100-220V 50-60HZ - 350mA - 9W	<b>C E</b> 1968
JUB5625	CONNECTION BOX IP68 - 3X4 mm <sup>2</sup>	<b>C E</b> 11968
JUB5630	JUNCTION BOX IP68 - 2X1,5 mm <sup>2</sup>	<b>C E</b> 1968
OPTIONAL BULE	B FOR TESLA / CLOCHE WALL / DOME COLLECTION	CE
LTLED04WE27	LED FILAMENT BULB 3W - 220V/E27 - 2200K - 300lm	



#### STAINLESS STEEL

Stainless steel, better known as Inox is an iron alloy in which the resistance to corrosion is increased through the addition of chrome and nickel. The principle involves the protection of the outside surface by chromium oxide and nickel oxide molecules. These molecules are much bigger than the underlying iron atoms, which prevents the latter from combining with oxygen to form iron oxides - better known as rust. This passive laver protects the precious steel and is self-renewing. In order to obtain a chromium- and nickel oxide skin that is as pure and homogeneous as possible, and therefore optimally corrosion-resistant, the standard Royal Botania frames are etched and rinsed with demineralised water after which a passive layer is formed by natural oxidation. Chlorine is the biggest enemy of stainless steel and can cause a form of corrosion known as "pitting". Contamination by chlorides or rusting particles can penetrate the passive layer and cause corrosion in certain places. This is especially important when near the sea, because of course sea salt is sodium chloride. It is necessary to give the metal as smooth a surface as possible in order to give it an even greater resistance to corrosion. This is because if the surface is smooth, there is less chance for contamination to take hold on the metal surface, thus reducing possible corrosion.



#### GLASS

Royal Botania offers 4 varieties of coloured glass: clear, smoke, amber and opal. All handmade and highly suitable for outdoor use.

#### **POWDER COATED ALUMINIUM**

Aluminium is a non-ferrous metal, which combines great mechanical rigidity with light weight; this makes it especially suitable for making outdoor lighting. If treated correctly it has a good resistance to corrosion. One of the treatments is powdercoating. After a chemical pre-treatment an epoxy powder is applied electrostatically and baked. The advantages are easy cleaning and endless colour variations. Powdercoating is a type of coating that is applied as a free flowing, dry powder. The coating is typically applied electrostatically and is then cured under heat to allow it to flow and form a "skin". Powdercoating provides excellent protection against corrosion.

#### (ANTIQUE) BRASS

Brass is an alloy of copper and zinc. The darker finish (antique brass) is achieved by dipping the brass in acid, which gives it an antique look.



#### MATERIALS

#### TEAK

Because Royal Botania makes no concessions when it comes to quality, we only use carefully selected, fully grown teak, which is harvested in accordance with the strictest environmental standards. The wood comes from the Tectona Grandis, a tree that can grow to a height of 45m under the right conditions with a trunk diameter of up to 2.4 metres. The reason for its generally commended durability is the high levels of natural oils it contains. The resulting minimal moisture absorption prevents warping which gives it great stability. Moreover, the wood is extremely resistant to the influences of chemicals, as well as against attacks by vermin. Because of these qualities, combined with its exceptionally-beautiful colour and structure, teak is classed as the most premium wood on our precious planet.

#### CORIAN ®

Corian<sup>®</sup> is a 'solid surface' material made of mass-dyed composite material, they combine mass with homogeneity, yet without seams or joints. The basic ingredient of this product is aluminium trihydrate (ATH). Other components are acrylic resins, which are used as a binder. Aluminium hydroxide makes the material very sturdy and also more heat-resistant than other synthetic materials. 5 good reasons for choosing this material: 1. hard-wearing 2. non-porous 3. hygienic 4. impact-resistant 5. uV-resistant.

#### ZINC

The zinc alloy used to manufacture Royal Botania lighting will look white in colour when first installed in the landscape. This is due to the acidification of the zinc oxide. At a later stage, this white deposit will wash off and will turn into a lovely darkgrey patina.

PORCELAIN

Porcelain, refined and produced with modern and sophisticated techniques remains stable in all temperatures. It's extremely hard, wear-resistant and colorfast. This sustainable and lifelong porcelain is very suitable for indoor- and outdoor use.

#### CAST IRON

Royal Botania uses a cast iron alloy with a small percentage of copper and chrome. This prevents any layer of oxidation created by contact with air and water from flaking off. The result is an even, rust-coloured patina that blends in perfectly with the natural surroundings.

#### GRANITE

Royal Botania uses solid granite. Granite is one of the hardest types of stone in the world. The unusual pattern and structure of the stone gives every bollard its own special look and character. simply clean with water and natural soap.

#### POLYETHYLENE

PE, or Polyethylene, is a thermoplastic polymer consisting of long hydrocarbon chains which is very durable and ideal for outdoor use.

#### PVC COVERED FIBREGLASS

The PVC covered fiber provides a solid core. This material requires a strong tensile and tear strengths, waterproofing, and heat and mildew resistance.

#### **3D FABRIC**

Made of synthetic fibers with a spacer layer of polyester microfilaments, absorbs little water and dries very fast in open air.

#### ARABESCATO CARRARA

The translucent material highlights the natural beauty of marble.

#### POLYOLEFIN

This is a synthetic fibre made from polyethylene. The advantage of this fibre is its strength, colour fastness. Also it is very resistant to staining and different weather conditions.















# J&B EXCLUSIEVE TUINMEUBELEN

Ettensebaan 17A1 4812 XA Breda www.jenb.nl 076-5961636

